

# More Precision.



## optris® CS

Compact low cost infrared thermometer for -20 to 350°C



### FEATURES

- Size: M12x1, 87 mm long, stainless steel housing
- Temperature range: -20 to 350°C
- Rugged coated silicon optics
- Integrated electronics with LED alarm indication and smart electronic sighting support
- Usable up to 75°C ambient temperature without cooling
- Scalable analog output: 0 - 10 V or 0 - 5 V
- Short circuit and polarity reversal protection
- Adjustable signal processing
- Optional USB programming interface and software
- Wide power range: 5 - 7, 12 - 28 V DC

#### General Specifications


Environmental rating	IP65 (NEMA-4)
Ambient temperature	-20 - 75°C
Storage temperature	-20 - 85°C
Relative humidity	10 - 95%, non condensing
Vibration	IEC 68-2-6: 3 G, 11 - 200 Hz any axis
Shock	IEC 68-2-27: 50 G, 11 ms any axis
Weight	58 g
<b>Electrical Specifications</b>	
Outputs/analog	0 - 5 V or 0 - 10 V 1/10/100 mV/°C
Alternative: Outputs/digital	USB or alarm
Inputs	programmable functional input for external emissivity/ambient temperature adjustment (0 - 5 V DC), hold function or USB communication
Cable length	1 m (standard), 3 m, 8 m, 15 m
Power supply	5 - 7, 12 - 28 V DC
Current draw	15 mA, 9 mA

#### Measurement Specifications


Temperature range (scalable via software)	-20 - 350°C
Spectral range	8 - 14 μm
Optical resolution (90% energy)	10:1
CF-lens (optional)	1.2 mm @ 10 mm
System accuracy (at ambient temperature 23 ±5°C)	±1.5% or ±1.5°C <sup>1</sup>
Repeatability (at ambient temperature 23 ±5°C)	±0.75% or ±0.75°C <sup>1</sup>
Temperature resolution (at object temperature > 20°C and time constant >0.2 s)	0.2°C
Response time (90%)	30 ms - 999 s, adjustable
Emissivity/Gain (adjustable via 0 - 5 V DC input or software)	0.100 - 1.100
Transmissivity (adjustable via software)	0.100 - 1.100
Signal processing (parameter adjustable via software)	peak hold, valley hold, average

<sup>1</sup> object temperature > 0°C; whichever is greater

## Optical Specifications

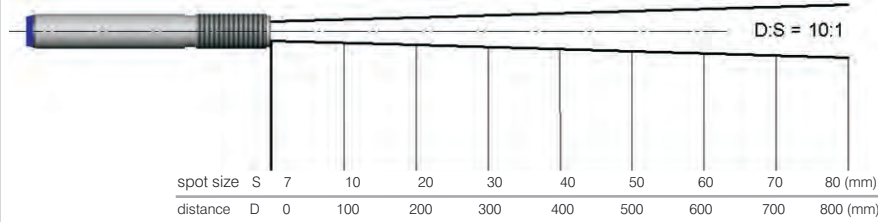


10:1 optics

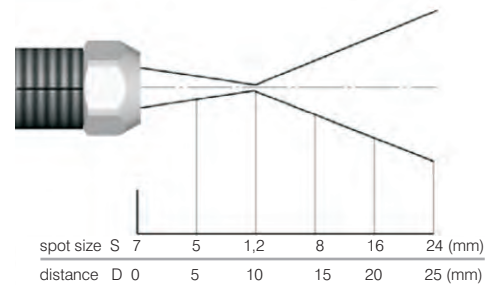


10:1 optics with CF-lens

## Dimensions/Connections

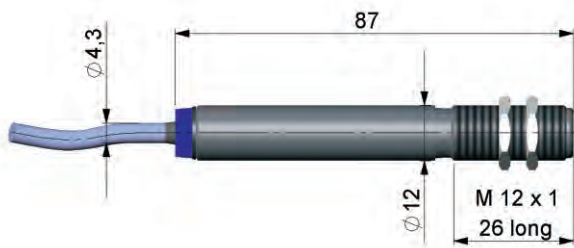


Dimensions CS

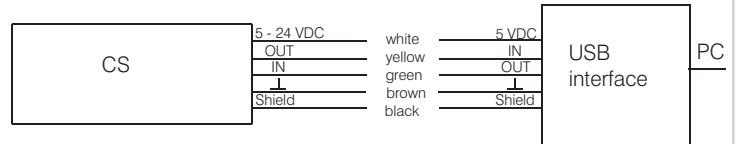


Connection diagram CS/USB programming interface

## Accessories




Mounting bracket, fixed



Mounting bolt with M12x1-thread



Mounting fork, adjustable in 2 axis, with M12x1-thread




Air purge collar, optional with integrated CF-lens



CF-lens

## Compact Connect Software

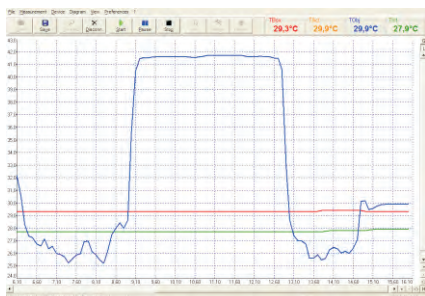

- Software for easy sensor setup and remote controlling, supports multi tasking
- Graphic display for temperature trends and automatic data logging for analysis and documentation with 1 ms response time
- Adjustment of signal processing functions and programming of outputs and functional inputs of the sensor
- The software Compact Connect allows to customize the sensor to application needs of the user