

More Precision.



optris® CSmicro 2W LT

low cost micro size two-wire infrared thermometers for -30 - 900°C



FEATURES

- Temperature ranges: -30°C to 900°C
- Size: M12x1, 28 mm long, stainless steel housing
- Scalable 4 - 20 mA analog output / additional simultaneous alarm output
- Rugged coated silicon optics
- Usable up to 120°C ambient temperature without cooling (sensing head)
- Cable built in electronics
- Short circuit and polarity reversal protection
- Adjustable signal processing
- Optional USB programming interface and software
- Wide power range: 5 - 30 V DC

General Specifications	
Environmental rating	IP65 (NEMA-4)
Ambient temperature	-20 - 85°C (sensing head 2W LT)
	-20 - 120°C (sensing head 2W LTF)
	-20 - 75°C (electronics)
Storage temperature	-40 - 85°C (sensing head and electronics)
Relative humidity	10 - 95%, non condensing
Vibration	IEC 68-2-6: 3 G, 11 - 200 Hz, any axis
Shock	IEC 68-2-27: 50 G, 11 ms, any axis
Weight	42 g
Electrical Specifications	
Output/analog	4 - 20 mA
Loop resistance	max. 1000Ω ¹⁾
Output/alarm	0 - 30 V / 500 mA (open collector)
Output/digital	uni / bidirectional, 9,6 kBaud, 0/3 V digital level, USB optional
Cable length	1 m
	0.5 m between sensing head and electronics
	0.4 m between electronics and terminal
Power supply	5 - 30 V DC

¹⁾ in dependence on supply voltage





Measurement Specifications	
Temperature range (scalable via software)	-30 - 900°C
Spectral range	8 - 14 μm
Optical resolution (90% energy)	10:1 (2W LTF)
	15:1 (2W LT)
CF-lens for LT model (optional)	0.8 mm @ 10 mm
System accuracy	±1.0% or ±1.5°C ^{1), 2)}
Repeatability	±0.75% or ±0.75°C ^{1), 2)}
Temperature resolution (at object temperature > 20°C and time constant > 0.2 s)	0.1°C
Response time (90%)	150 ms (2W LT)
	30 ms (2W LTF)
Emissivity/Gain (adjustable via software)	0.100 - 1.100
Transmissivity (adjustable via software)	0.100 - 1.000
Signal processing (parameter adjustable via software)	peak hold, valley hold, average
Dimensions of electronics	length
	diameter
	45 mm
	12 mm

¹⁾ object temperature > 0°C; whichever is greater


²⁾ at ambient temperature 23 ±5°C, ε = 1, response time 1s

optris® CSmicro 2W LT



Optical Specifications

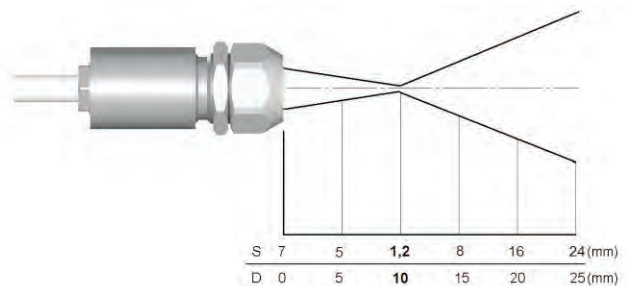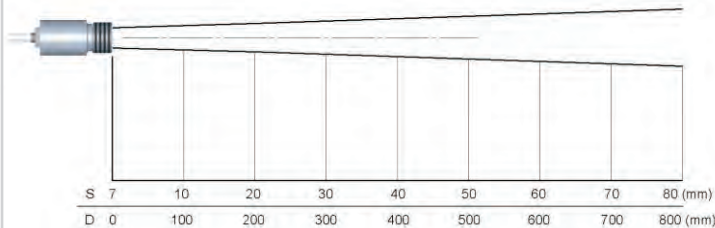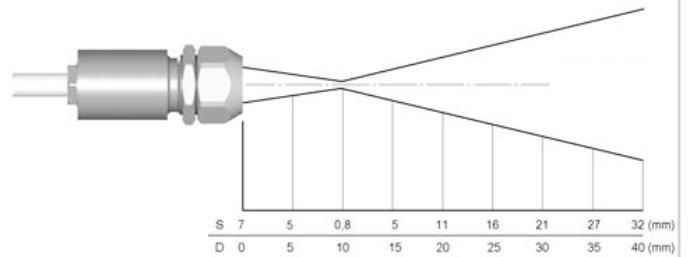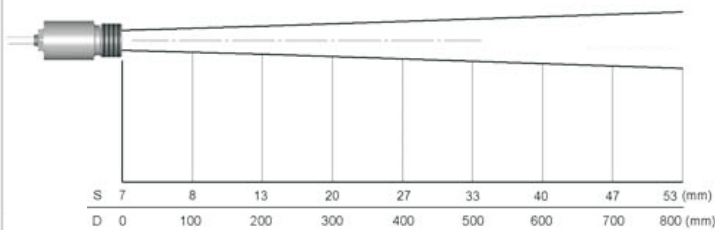


Dimensions / Connections

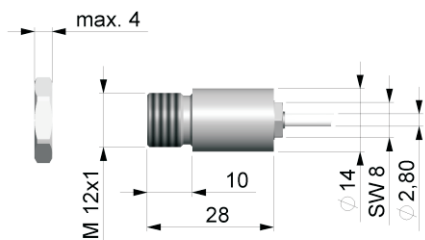

Dimensions CSmicro 2W

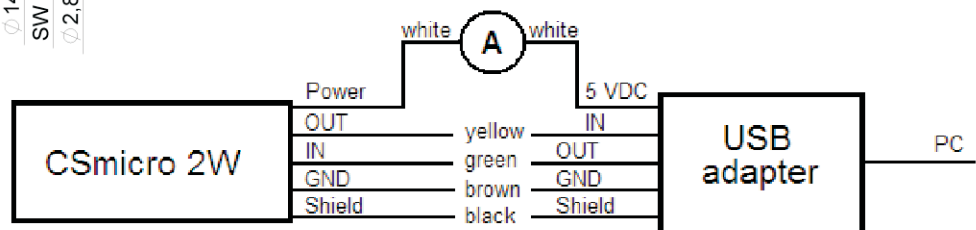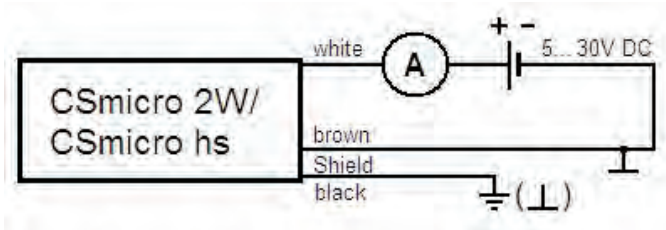

CompactConnect Software

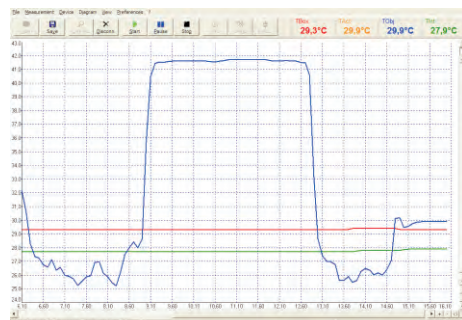

- Software for easy sensor setup and remote controlling, supports multi tasking
- Graphic display for temperature trends and automatic data logging for analysis and documentation with 1 ms response time
- Adjustment of signal processing functions and programming of the sensor outputs
- The software Compact Connect allows to customize the sensor to application needs of the user